



Ref.: 8000-0006

QD-60NOFF

DIN rail 6 x on/off switch

Description

6-fold on/off switch equipped with high in-rush current relays and 4 voltage detection binary inputs, each configurable for operation as push-button or detector. Each switch may be controlled by up to 28 different buttons.

Accessories

None

Electrical characteristics



Power supply: 230 V 50 Hz
 Consumption: 0.5 W
 Maximum current: 16 A (cos φ=1)
 In-rush current: 500 A, 2 ms
 Voltage inputs: 24VDC to 230VAC

Certifications

CE
 IEC 60669-2-1
 Low voltage directive 2014/35/EU
 EMC directive 2014/30/EU

Dimensions

A = 71.2 mm (4 modules)
 B = 90 mm
 C = 62 mm
 D = 46 mm
 E = 58 mm

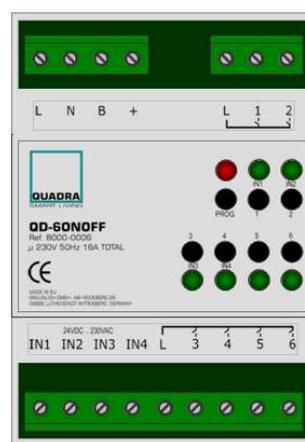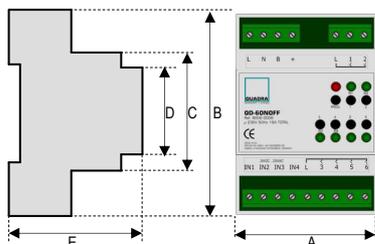

Connection diagram:

